



gorenje
pininfarina


PRODUCT OVERVIEW




gorenje
pininfarina

Gorenje UK Ltd.
Tuition House
27-37 St. Georges Road
London SW19 4EU
tel: 020 8247 39 80
fax: 020 8247 39 99
E-mail: info@gorenje.co.uk
Web: www.gorenje.co.uk

Gorenje, d.d.
SI - 3503 Velenje
Slovenia
Tel: +386 3 8991 000
Fax: +386 3 8992 800
www.gorenje.com

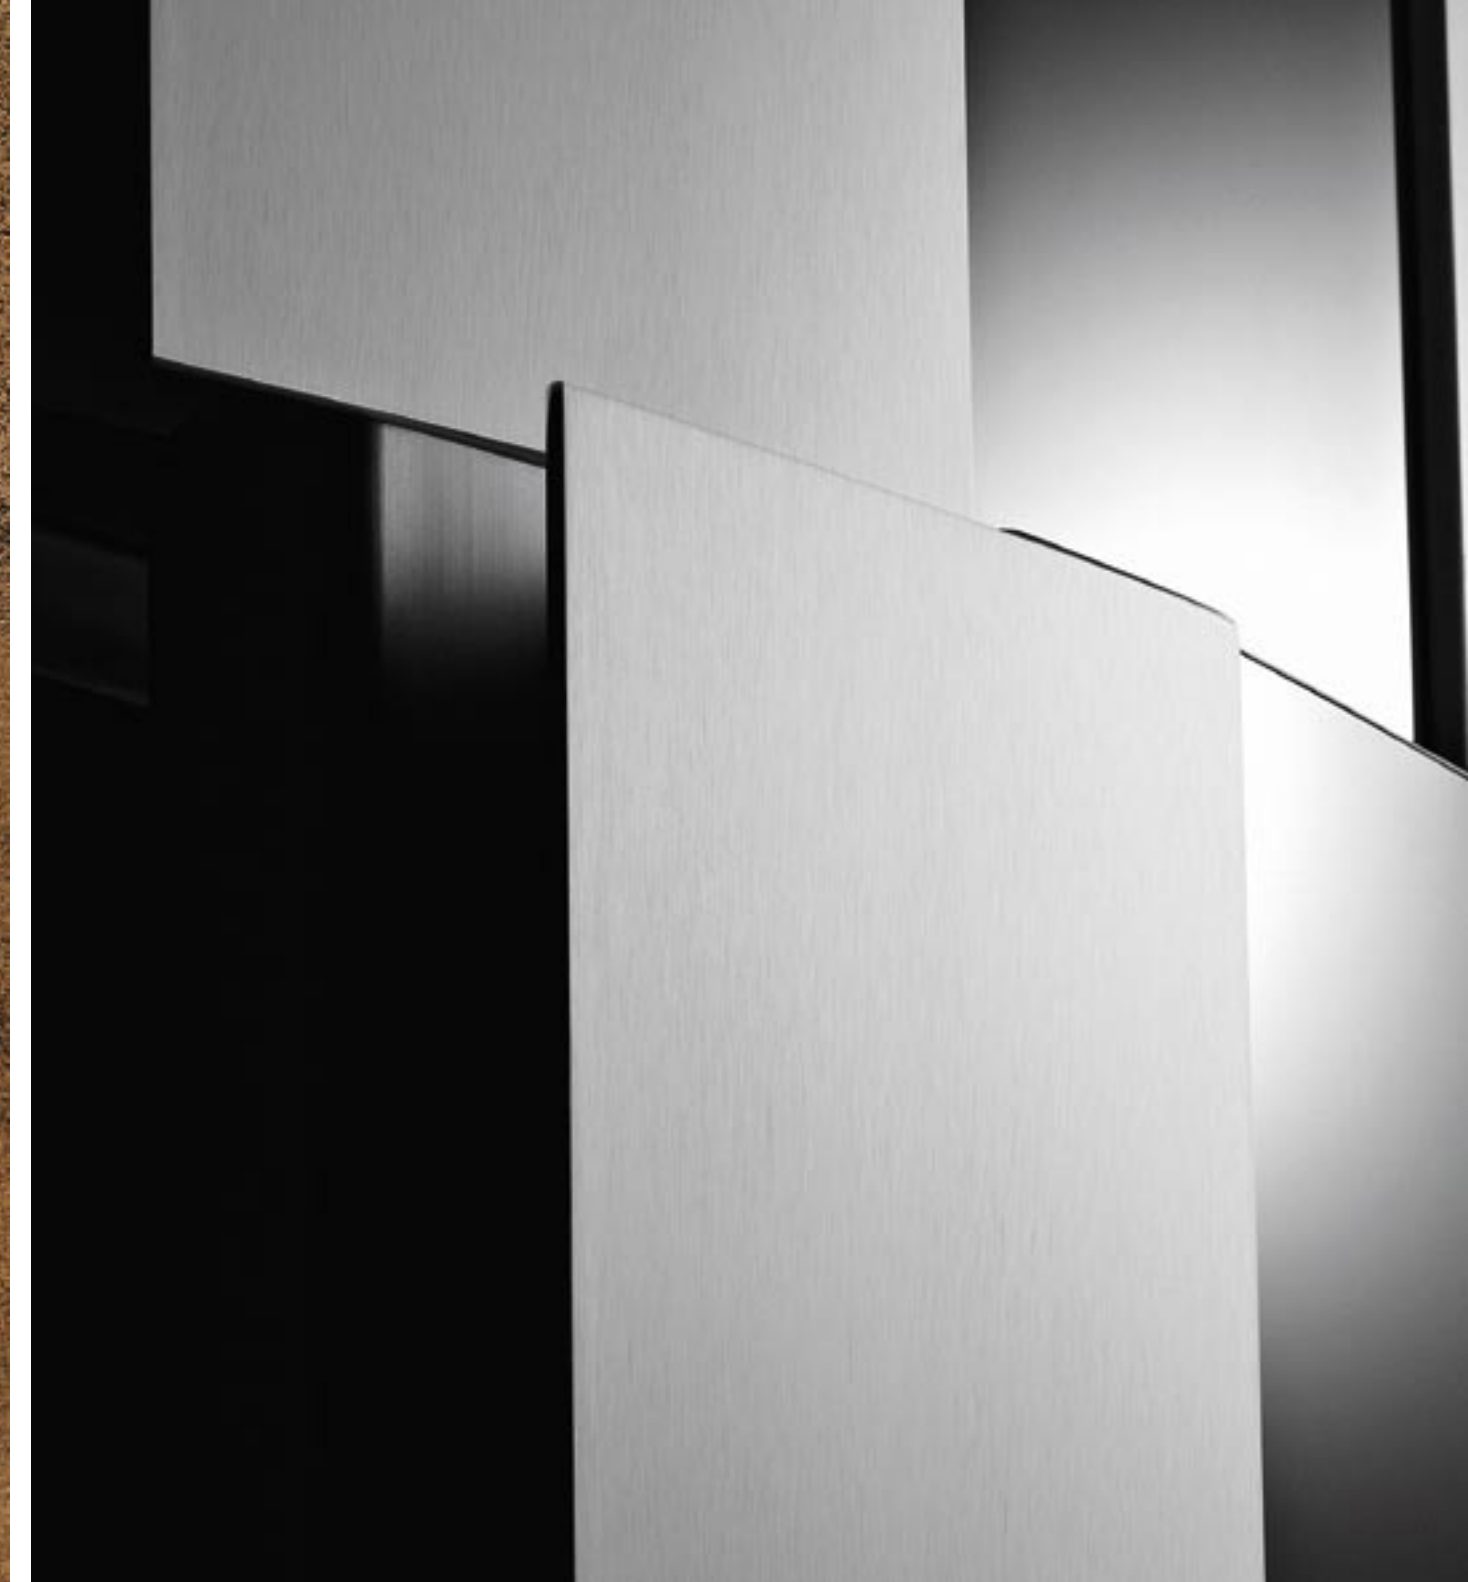

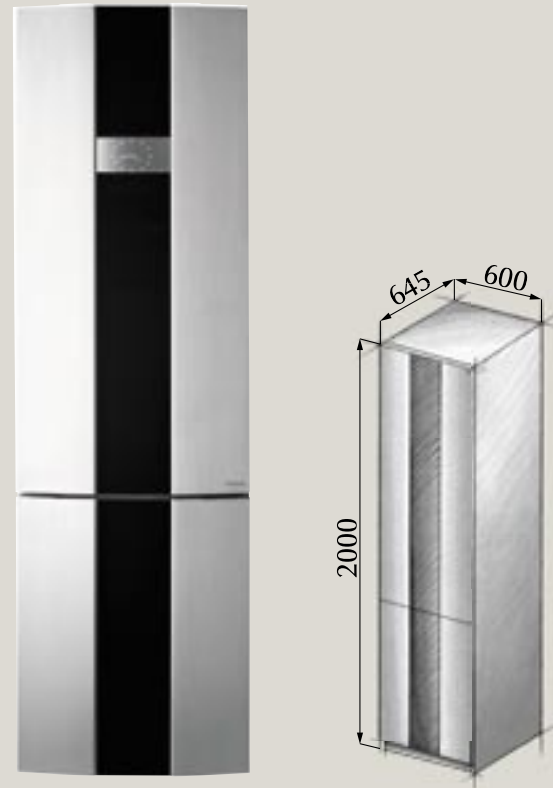

RK 2000 P2 ******* **A**

Combination fridge-freezer

Operational features

Touch sensitive control screen
Multiflow cooling - fridge
Automatic defrost - fridge
Fast drinks cooling - fridge / freezer
Fast cooling & fast freezing

Extra features

Quick view window
Zero n' Fresh - 0°C drawer / 33 L
2 large vegetable drawers
2 utility boxes
Flexible egg tray (12), 2 ice trays, tube holder
Deep partitioned bottle shelf on door
Wine rack
Safe and hygienic filter for odours in refrigerator
Suberb illumination on interior with halogen lamp
Drawer Big'n'Freeze

Saving/Security

Precise temperature control for both fridge and freezer
Vacation mode Go'n'Save
Eco saving mode
Sound signals for various functions
Antibacterial protection - fridge

Capacities/Dimensions

Net capacity fridge/freezer: 245/86 L
Freezing capacity: 10 kg/24h
Energy consumption: 0,87 kWh/day
Power cut safe time: 18 h
Dimensions (W / H / D): 60 / 200 / 64,5 cm

B 2000 P2

Built-In Oven

Oven

Multi system oven - 53 L capacity
Controlled by electronic touch-sensitive module
Oven illumination
Pull out telescopic oven guides
Eco-Enamel
Efficient cooling with vertical vents

Bottom and upper heater
Infra-red grill
Infra-red grill with fan
Bottom element with circular heat and fan
Circular heater and fan
Defrost function
Bottom element with fan only
Aqua Clean Programme
Top heating

Fittings


1 oven grid
Deep enamelled baking tray
Shallow enamelled baking tray
Glass baking tray
Pan support handle
Grease filter
Connection cable

Safety systems

Quadro UCD - Ultra Cool Door with 3 layered glass
DCS Dynamic Cooling System

Technical characteristics/Dimensions

Energy class: A
Oven consumption (venting operation): 0.79 kWh
Nominal power: 3.4 kW
Dimensions (W / H / D): 59,7 / 59,5 / 56,8 cm
Cut-out dimensions (W / H / D): 56-56,8 / 59-60 / 55 cm

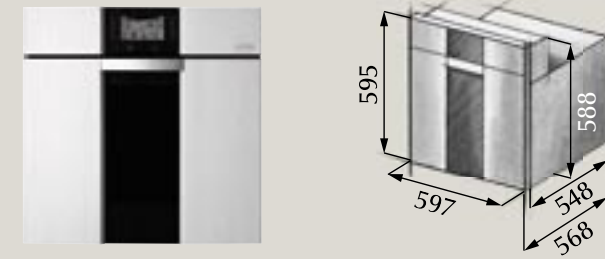

EC 2000 P2

Electric cooker

Hob

Glassceramic hob
Slider Touch control
Cooking areas:
• left front: Ø 210/175/120 mm, 2,3 kW, HI-LIGHT
• right front: Ø 145 mm, 1,2 kW, HI-LIGHT
• left back: Ø 145 mm, 1,2 kW, HI-LIGHT
• right back: Ø 140/250 mm, 2 kW, HI-LIGHT

Oven

Multi system oven - 53 L
Electronic touch sensitive control module
Pull out telescopic oven guides
Eco-Enamel
Oven cooling vents at rear of hob

Bottom and upper heater
Infra-red grill
Infra-red grill with fan
Bottom element with circular heat and fan
Circular heater and fan
Defrost function
Bottom element with fan only
Aqua Clean Programme

Fittings



Cooker power indicator light
1 oven grid
Deep enamelled baking tray
Shallow enamelled baking tray
Glass baking tray
Grease filter

Safety systems

Quadro UCD - Ultra Cool Door with 3 layered glass

Technical characteristics/Dimensions

Energy class: A
Oven consumption (venting operation): 0.79 kWh
Nominal power: 10.1 kW
Dimensions (W / H / D): 60 / 85 / 60 cm

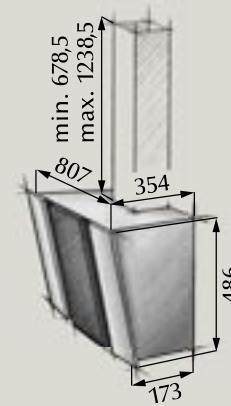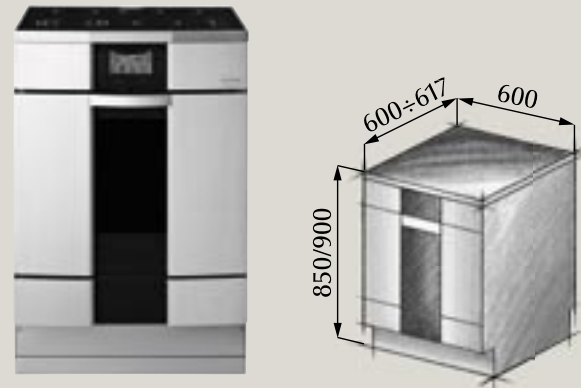

DK 2000 P2

Wall mount 80cm cooker hood

Features


Touch control system
Aluminium grease filter
No-return air flow flap

Additional equipment

Charcoal filter

Technical characteristics/Dimensions


Width: 807 mm
Illumination: 2x20W (halogen light)
Venting tube diameter: 150 mm
Max. extraction rate by extraction operation: 750 m³/h
Max. extraction rate by recirculation operation: 510 m³/h



DFP 2000 P2

Microwave decor panel

Dimensions (H / W): 46,3 / 59,6 cm

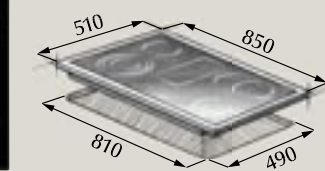

ECT 2800 P2

Built-In 85cm Hob

Hob

Glassceramic hob
Slider Touch control
Residual heat indicator

Cooking areas:

- left front: Ø 210/175/120 mm, 2,3 kW, HI-LIGHT
- middle front: 290X160 mm, 0,1 kW
- left back: Ø 145 mm, 1,2 kW, HI-LIGHT
- right front: Ø 145 mm, 1,2 kW, HI-LIGHT
- right back: Ø 265X170 mm, 2,4 kW, HI-LIGHT

Technical characteristics/Dimensions


Nominal power: 7.2 kW
Dimensions (W / H / D): 85 / 0,6 / 51 cm
Niche dimensions (W / H / D): 81 / 5,5 / 49 cm



DFG 2072 P2

Dishwasher decor panel

Dimensions (H / W): max. 72,0 / 59,6 cm

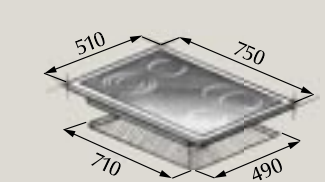

ECT 2700 P2

Built-In 75cm Hob

Hob


Glassceramic hob
Slider Touch control
Residual heat indicator

Cooking areas:

- left front: Ø 210/175/120 mm, 2,3 kW, HI-LIGHT
- right front: Ø 145 mm, 1,2 kW, HI-LIGHT
- left back: Ø 145 mm, 1,2 kW, HI-LIGHT
- right back: Ø 170X265 mm, 2,4 kW, HI-LIGHT

Technical characteristics/Dimensions

Nominal power: 7.1 kW
Dimensions (W / H / D): 75 / 0,6 / 51 cm
Niche dimensions (W / H / D): 71 / 5,5 / 49 cm

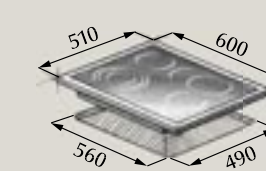

ECT 2600 P2

Built-In 60cm Hob

Hob


Glassceramic hob
Slider Touch control
Residual heat indicator

Cooking areas:

- left front: Ø 210/175/120 mm, 2,3 kW, HI-LIGHT
- right front: Ø 145 mm, 1,2 kW, HI-LIGHT
- left back: Ø 145 mm, 1,2 kW, HI-LIGHT
- right back: Ø 170X265 mm, 2,4 kW, HI-LIGHT

Technical characteristics/Dimensions

Nominal power: 7.1 kW
Dimensions (W / H / D): 60 / 0,6 / 51 cm
Niche dimensions (W / H / D): 56 / 5,5 / 49 cm

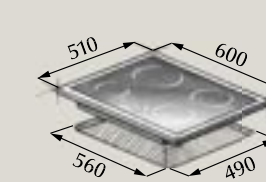

EIT 2600 P2

Built-In 60cm Hob

Hob


Glassceramic induction hob
Touch control
Residual heat indicator

Cooking areas:

- left front: Ø 145 mm, 1,4 kW
- right front: Ø 180 mm, 1,85 kW
- left back: Ø 210 mm, 2,3 kW
- right back: Ø 180 mm, 1,85 kW

Technical characteristics/Dimensions

Nominal power: 7.4 kW
Dimensions (W / H / D): 60 / 6,0 / 51 cm
Niche dimensions (W / H / D): 56 / 5,5 / 49 cm

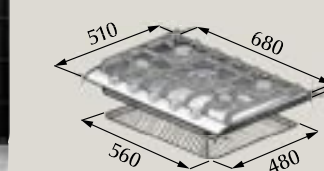

GMS 2700 P2

Built-In-Gas 70cm Hob

Hob

Gas burners with pilot flame- electronic ignition incorporated in the knobs
Enamelled cast iron pan supports and burner caps
Safety burners
Aluminium frame
Adaptable for different type of gas
Colour of the glass- black colour

Cooking areas:

- 2 Semi Rapid burners - 1750 W
- 1 rapid burner - 3000 W
- 1 Auxiliary burner - 1000 W
- 1 wok-triple burner- 3500 W

Technical characteristics/Dimensions

High flame output which totals 11000 watts of flame power altogether,
50-60 Hz, Electric supply AC 230V
Dimensions (W / H / D): 68 / 5,1 / 51 cm
Niche dimensions (W / H / D): 56 / 4,0 / 48 cm